

ETITEC C T2 275/20 2+0



Specifications

ETI Code	002440397
Description	ETITEC C T2 275/20 2+0
Class name	Surge arrester
Function	SPD
Type	T2
Max. Discharge current I _{max} , 8/20 (kA)	40
U _c Continuous Operating Voltage (V)	275
Remote signalisation	NO
Network system	TNS
Catalogue Group	ETITEC C
In 8/20 (kA)	20
Number of modules	2
Up - Voltage Protection Level (kV)	<1,5
Leakage Current	YES
Applied Technology	MOV
Built-in depth (mm)	68

Online product page [🔗](#)

Other documentation



Technical data catalogue

3D Model

Instruction manual


CE declaration

Eplan file


ETIM international classification

Classification	EC000941
Class name	Surge protection device for power supply systems
System configuration TN	1
Nominal discharge surge current (8/20)	20kA
Nominal voltage AC	230V
Max. continuous voltage AC	275V
Mounting method	DIN rail (top hat rail) 35 mm
Construction size	2 modular spacing
Voltage protection level	1.5kV
Max. conductor cross section solid (solid, stranded)	35mm ²
Max. conductor cross section flexible (fine-strand)	25mm ²
Signalling at the device	Optical
Category type 2	1


Dimension drawing

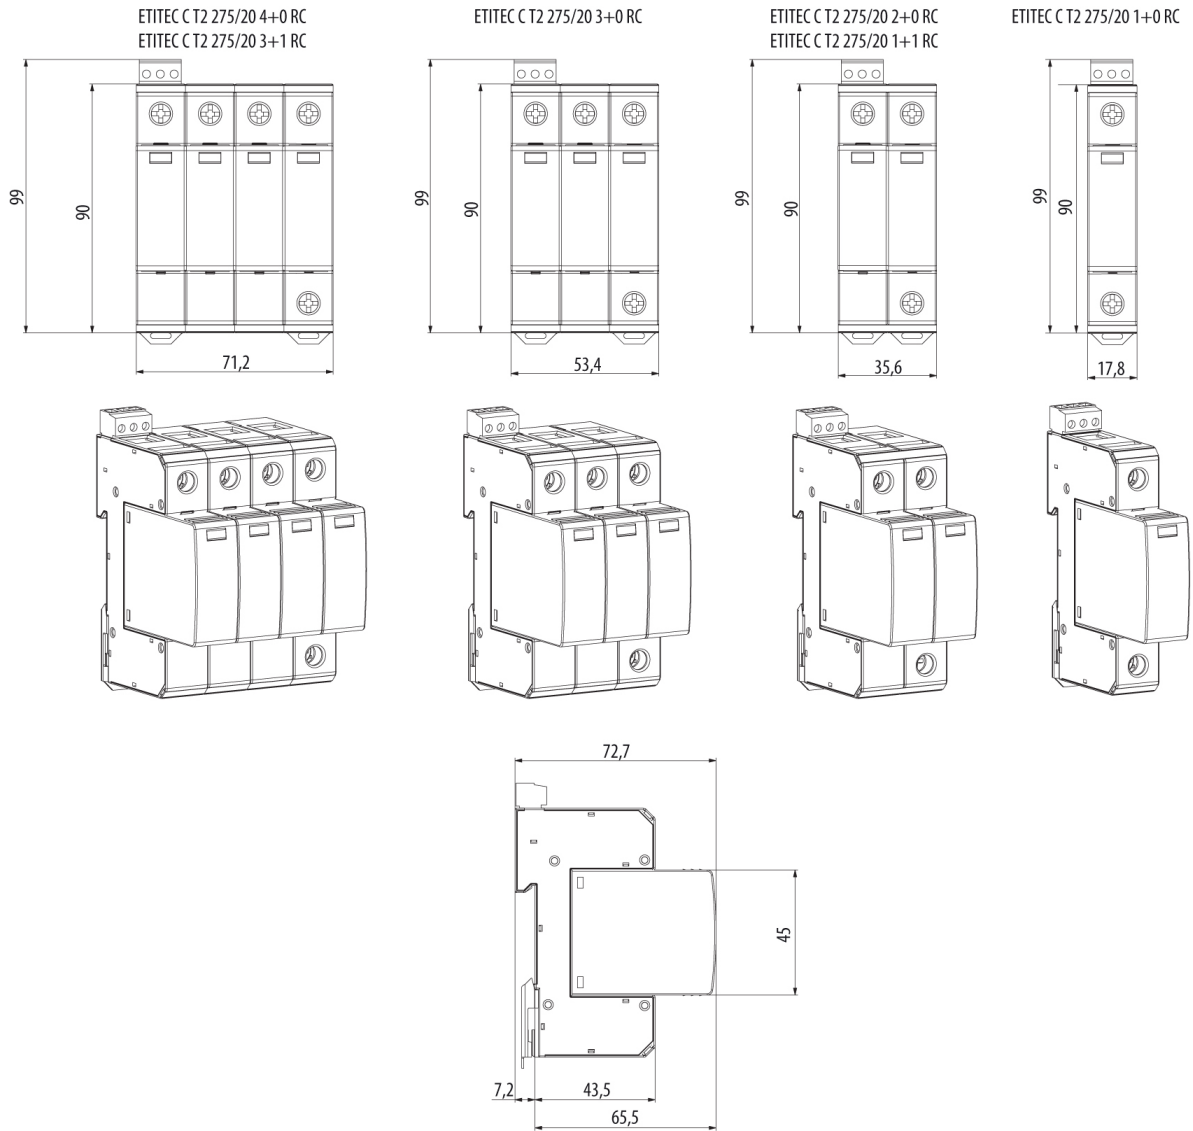


Symbol/Connection




ETITEC CT2 G




ETITEC CT2 1+0 RC




ETITEC CT2 1+1 RC




ETITEC CT2 2+0 RC

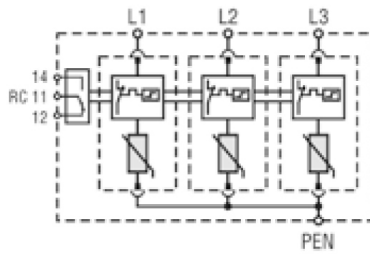

ETITEC CT2 3+0 RC

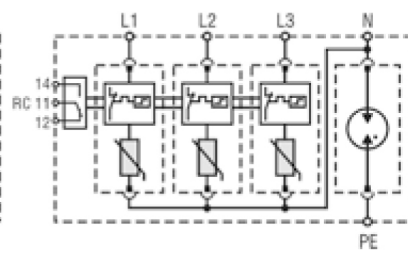

ETITEC CT2 3+1 RC

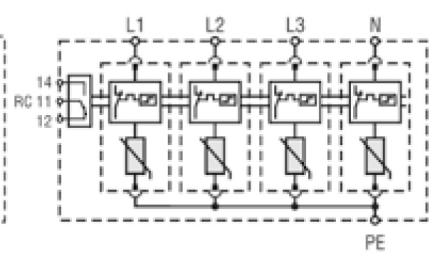

ETITEC CT2 4+0 RC